

1000BASE-T SFP Copper RJ-45 100m Transceiver

SFP-GB-GE-T



Application

- LAN 1000Base-T
- Gigabit Ethernet over Cat6/Cat6a Cable
- Switch to Switch Interface
- Router/Server Interface

Features

- Support 1000BASE-T Operation in Host Systems
- Support RX_LOS as Link indication function
- For 100m Reach Over UTP Cat6/Cat6a Cable
- Hot-Pluggable SFP Footprint
- Fully Metallic Enclosure for Low EMI
- Low Power Dissipation (1.05W Typical)
- Compact RJ-45 Connector Assembly
- Access to Physical Layer IC via 2-Wire Serial Bus
- Detailed Product Information in EEPROM
- Compliant with MSA SFP
- Commercial Temperature Range: 0~70°C
- Compliant with IEEE Std 802.3-2002

Description

SFP-GB-GE-T 1000BASE-T Copper Small Form Pluggable (SFP) modules are based on the SFP Multi Source Agreement (MSA). It is compliant with the Gigabit Ethernet and 1000BASE-T standards as specified in IEEE STD 802.3 and 802.3ab.

Product Specifications

I. General Specifications

Parameter	Symbol	Typ.	Min	Max	Units	Notes
Data rate		1000			Mbps	
Distance				100	m	Cat6/Cat6a UTP. BER <10 ⁻¹²

II. Absolute Maximum Ratings

Parameter	Symbol	Min	Typ.	Max	Unit
Maximum Supply Voltage	V _{cc}	-0.5		4.0	V
Storage Temperature	T _s	-40		85	° C

III. Electrical Characteristics

Parameter	Symbol	Typ.	Min	Max	Unit	Notes/Conditions
-----------	--------	------	-----	-----	------	------------------

+3.3 Volt Electrical Power Interface

Supply Current	I _{cc}		300	350	mA	
Input Voltage	V _{cc}	3.13	3.3	3.47	V	
Surge Current	I _{surge}			30	mA	

Low-Speed Signals, Electronic Characteristics

SFP Output LOW	V _{OL}	0		0.5	V	4.7k to 10k pull-up to host_V _{cc} , measured at host side of connector
-----------------------	-----------------	---	--	-----	---	--

SFP Output HIGH	V_{OH}	host_Vcc - 0.5		host_Vcc +	0.3	V	4.7k to 10k pull-up to host_Vcc, measured at host side of connector
SFP Input LOW	V_{IL}	0			0.8	V	4.7k to 10k pull-up to Vcc, measured at SFP side of connector
SFP Input HIGH	V_{IH}	2		VCC +	0.3	V	4.7k to 10k pull-up to Vcc, measured at SFP side of connector


High-Speed Electrical Interface, Transmission Line-SFP

Line Frequency	f_L		125			MHz	5-level encoding, per IEEE 802.3
Tx Output impedance	$Z_{out, TX}$		100			Ohm	Differential, for all frequencies between 1MHz and 125MHz
Rx Input Impedance	$Z_{in, RX}$		100			Ohm	Differential, for all frequencies between 1MHz and 125MHz

High-Speed Electrical Interface, Host-SFP

Single ended data input swing	V_{in}	250		1200		mV	Single ended
Single ended dataoutput swing	V_{out}	350		800		mV	Single ended
Rise/Fall Time	T_r, T_f		175			psec	20%-80%
Tx Input Impedance	Z_{in}		50			Ohm	Single ended
Rx Output Impedance	Z_{out}		50			Ohm	Single ended

IV. Pin Description

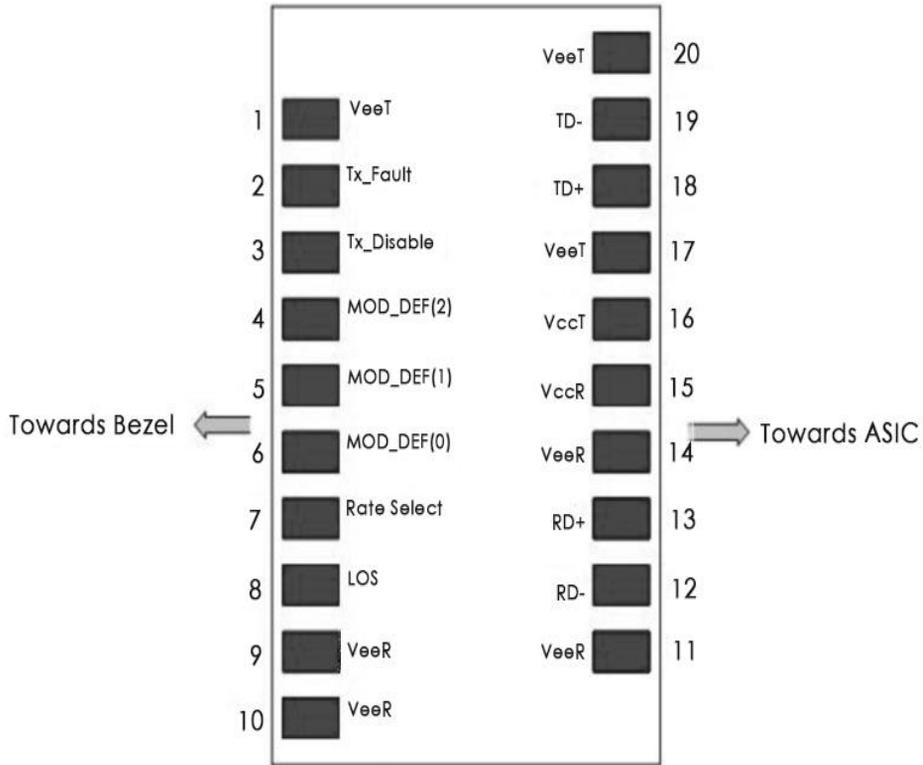

Pin No.	Name	Function	Plug Seq.	Notes
1	VeeT	Transmitter Ground	1	
2	TX Fault	Transmitter Fault Indication	3	Not used
3	TX Disable	Transmitter Disable	3	Note 1
4	MOD-DEF2	Module Definition 2	3	Note 2
5	MOD-DEF1	Module Definition 1	3	Note 2
6	MOD-DEF0	Module Definition 0	3	Note 2
7	Rate Select	Not Connected	3	
8	LOS	Loss of Signal	3	RX_LOSS
9	VeeR	Receiver Ground	1	


10	VeeR	Receiver Ground	1	
11	VeeR	Receiver Ground	1	
12	RD-	Inv. Received Data Out	3	
13	RD+	Received Data Out	3	
14	VeeR	Receiver Ground	1	
15	VccR	Receiver Power	2	
16	VccT	Transmitter Power	2	
17	VeeT	Transmitter Ground	1	
18	TD+	Transmit Data In	3	
19	TD-	Inv. Transmit Data In	3	
20	VeeT	Transmitter Ground	1	

Notes:

- 1.PHY disabled on TDIS > 2.0V or open, enabled on TDIS < 0.8V, used to reset the module.
- 2.Should be pulled up with 4.7k – 10k Ohm on host board to a voltage between 2.0 V and 3.6 V.MOD_DEF(0) pulls line low to indicate module is plugged in.

V. Mechanical Specifications

FS.COM Copper SFP transceivers are compliant with the dimensions defined by the SFP Multi-Sourcing Agreement (MSA).

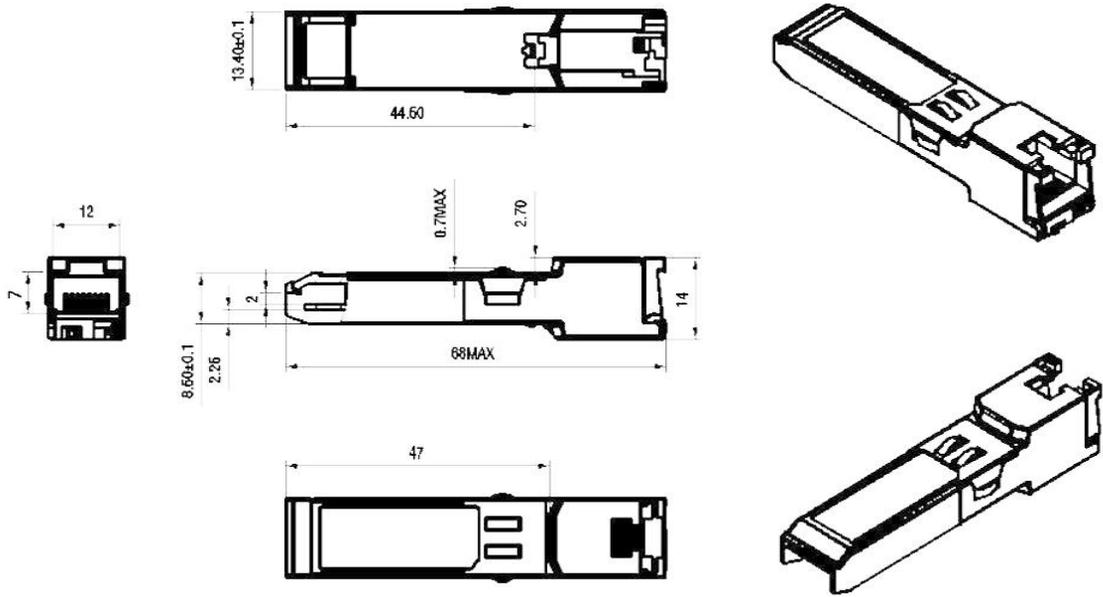

Test Center

FS.COM transceivers are tested to ensure connectivity and compatibility in our test center before shipped out. FS.COM test center is supported by a variety of mainstream original brand switches and groups of professional staff, helping our customers make the most efficient use of our products in their systems, network designs and deployments.

The original switches could be found nowhere but at FS.COM test center, eg: Juniper MX960 & EX 4300 series, Cisco Nexus 9396PX & Cisco ASR 9000 Series, HP 5900 Series & HP 5406R ZL2 V3(J9996A), Arista 7050S-64, Brocade ICX7750-26Q & ICX6610-48, Avaya VSP 7000 MDA 2, etc.



Cisco ASR 9000 Series(A9K-MPA-X40GE)



ARISTA 7050S-64(DCS-7050S-64)



Juniper MX960



Brocade ICX 7750-26Q



Extreme Networks X670V VIM-40G4X



Mellanox M3601Q



Dell N4032F



HP 5406R ZL2 V3(J9996A)




AVAYA 7024XLS(7002QQ-MDA)

Test Assured Program

FS.COM truly understands the value of compatibility and interoperability to each optics. Every module FS.COM provides must run through programming and an extensive series of platform diagnostic tests to prove its performance and compatibility. In our test center, we care of every detail from staff to facilities—professionally trained staff, advanced test facilities and comprehensive original-brand switches, to ensure our customers to receive the optics with superior quality.



Our smart data system allows effective product management and quality control according to the unique serial number, properly tracing the order, shipment and every part.

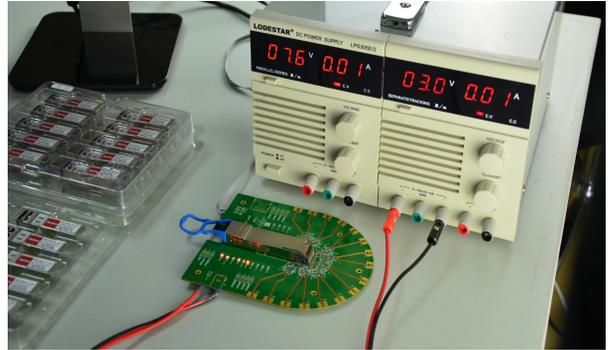

Our in-house coding facility programs all of our parts to standard OEM specs for compatibility on all major vendors and systems such as Cisco, Juniper, Brocade, HP, Dell, Arista and so on.



With a comprehensive line of original-brand switches, we can recreate an environment and test each optics in practical application to ensure quality and distance.



The last test assured step to ensure our products to be shipped with perfect package.

Order Information

Part Number	Description
SFP1G-SX-85	SFP, 1000BASE-SX, 850nm, MMF, 550m, LC, DOM
SFP1G-SX-31	SFP, 1000BASE-SX, 1310nm, SMF, 2km, LC, DOM
SFP1G-LX-31	SFP, 1000BASE-LX, 1310nm, SMF, 10km, LC, DOM
SFP1G-LX-31	SFP, 1000BASE-LX, 1310nm, SMF, 15km, LC, DOM
SFP1G-LX-31	SFP, 1000BASE-LX/LH, 1310nm, SMF, 20km, LC, DOM
SFP1G-LH-31	SFP, 1000BASE-EX, 1310nm, SMF, 40km, LC, DOM
SFP1G-EX-55	SFP, 1000BASE-EX, 1550nm, SMF, 40km, LC, DOM
SFP1G-ZX-55	SFP, 1000BASE-EX, 1550nm, SMF, 60km, LC, DOM
SFP1G-ZX-55	SFP, 1000BASE-ZX, 1550nm, SMF, 80km, LC, DOM
SFP1G-EZX-55	SFP, 1000BASE-EZX, 1550nm, SMF, 100km, LC, DOM
SFP1G-EZX-55	SFP, 1000BASE-EZX, 1550nm, SMF, 120km, LC, DOM
SFP-GB-T	SFP, 10/100/1000Base-T, SERDES/SGMII Interface
SFP-GB-T	SFP, 10/100/1000Base-T, SERDES Interface

Note:

1G SFP transceiver module is individually tested on corresponding equipment such as Cisco, Arista, Juniper, Dell, Brocade and other brands, and passes the monitoring of FS.COM intelligent quality control system.



 <https://www.fs.com>



All statements, technical information, and recommendations related to the products here are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. Please contact FS for more information.